



TOSUN-TC1013HV

User Manual

Product Features & Interface Overview

CAN FD to USB Interface

Product Name	Channel
TC1013HV	CAN FD * 2

Copyright Information

Shanghai TOSUN Technology Ltd.

No. 9 Building, 1288 Jiasong North Road, Jiading District, Shanghai (Headquarters)

Buildings 14-17, Lane 4849 Cao'an Highway (Shanghai Research Institute)

In an effort to provide users with the best possible service, Shanghai TOSUN Technology Ltd. (hereinafter referred to as “TOSUN Technology”) has made every attempt to present accurate and detailed product information as possible in this manual. However, due to the time-sensitive nature of the content, TOSUN Technology cannot guarantee the timeliness and applicability of the information at all times.

The information and data contained in this manual are subject to change without prior notice. For the latest updates, please visit the [official website of TOSUN Technology](#) or contact our support team directly. We appreciate your understanding and continued support!

No part of this manual may be reproduced in any form or by any means without prior written permission from TOSUN Technology.

@ Copyright 2024-2025, Shanghai TOSUN Technology Ltd. All rights reserved.

Typical Application

- Vehicle-level CAN (FD) network data acquisition and analysis
- Simulation, testing, and diagnostics of intelligence domain controllers (e.g., cockpit, ADAS)
- Building high-reliability automated test systems and endurance test benches
- Vehicle diagnostics, ECU calibration, and flash programming

Product Highlights

- High Precision

Hardware-level timestamp accuracy in the microsecond range, providing precise timing references for advance simulation and diagnostics.

- Plug-and-Play Compatibility

USB driver-free design. Fully plug-and-play under Windows and Linux with excellent system compatibility.

- Safe and Reliable

4500 VDC galvanic isolation per CAN channel. Automotive-grade design ensures stability under harsh conditions.

- Flexible Configuration

Software-configurable 120 Ω CAN termination for versatile network topologies.

- Ecosystem Integration

Fully compatible with mainstream formats such as DBC, and A2L. Seamless integration with all TSMaster licensed features.

- Professional Toolset

Supports BLF data logging and playback, UDS diagnostics, CCP/XCP calibration, and Flash Bootloader operations.

- Open and Extensible

Provides cross-platform APIs for secondary development.

Contents

Product Features & Interface Overview	2
Typical Application	3
Product Highlights	3
1. Introduction	6
1.1. Technical Specifications	6
1.2. Electrical Specifications	7
1.3. Pin Definition	9
1.4. LED Indicators	10
1.5. System Requirements	11
1.6. Packing List	11
2. Application Example in Windows	13
2.1. Software Connection	13
2.2. Hardware Connection	14
2.2.1. CAN	14
2.3. Usage Example	16
2.3.1. Sending a CAN Frame	16
3. Appendix	21
3.1. Software Installation	21
4. Inspection and Maintenance	26

1. Introduction

The TC1013HV is a dual-channel CAN FD interface device that supports CAN FD bit rates of up to 8 Mbps.

It connects to the PC via a USB 2.0 interface, and features a driver-free design for both Windows and Linux, ensuring excellent system compatibility.

Used with the powerful TSMaster software, it supports loading DBC and ARXML database files for convenient monitoring, analysis, and simulating of CAN FD bus data. It also supports UDS diagnostics, ECU flashing, and CCP/XCP calibration functions.

Included resources:

- CAN FD monitoring software TSMaster
- Cross-platform secondary development library (with a dedicated programming manual)



This document covers the operation of the device on Windows. For usage on Linux and other operating systems, please refer to the separate user manual.

1.1. Technical Specifications

➤ Device Specifications

Parameter	Description
PC Interface	USB 2.0
Timestamp Precision	Microsecond-level high-precision timestamps
Driver	Cross-platform, driver-free design
Connector	Standard D-Sub, 9-pin
License	Supports all TSMaster paid licenses
Power Supply	USB-powered
Power Consumption	2.5 W
ESD Protection	$\pm 8\text{kV}$ contact discharge, $\pm 15\text{kV}$ air charge

Enclosure Material	Plastic Housing
Dimensions	113 * 98* 38 mm
Weight	162.5 g
Operating Temperature	TBA
Operating Humidity	10% ~ 90% RH (no condensing)

➤ CAN Specifications

Parameter	Description
Connection Standard	High-speed CAN (ISO 11898-2 compliant)
Supported Protocols	Full support for CAN and CAN FD (ISO 11898-1 compliant)
CAN Baud Rate	125 kbps ~ 1 Mbps
CAN Frame Data Length	Up to 8 bytes
CAN FD Baud Rate	125 kbps ~ 8 Mbps
CAN FD Frame Data Length	Up to 64 bytes; supports BRS frames
Max Frame Rate	Transmit: 20,000 frames/s; Receive: 20,000 frames/s (single channel, 1 Mbps, remote frame, 0 data bytes)
Termination Resistor	120 Ω per CAN channel
Relay Type	Magnetic latching relay

1.2. Electrical Specifications

➤ Power Characteristics

Parameter	Condition	Min	Typ.	Max	Unit
Operating Voltage	USB power supply	--	5.0	--	V

Power Consumption	USB power supply	--	2.5	--	W
-------------------	------------------	----	-----	----	---

➤ CAN Interface Characteristics

Parameter	Condition	Min	Typ.	Max	Unit
Termination Resistance	Enabled	--	120	--	Ω
	Disabled	--	∞	--	--
Isolation Voltage	Insulation resistance test	4500	--	--	VDC

➤ EMC Performance

Test Item	Standard	Condition	Level	Unit
ESD	IEC 61000-4-2	Contact discharge	± 8	kV
		Air discharge	± 15	kV
EFT/Burst	IEC 61000-4-4	Electrical fast transient	± 2	kV

➤ Mechanical Dimensions

Unit: mm

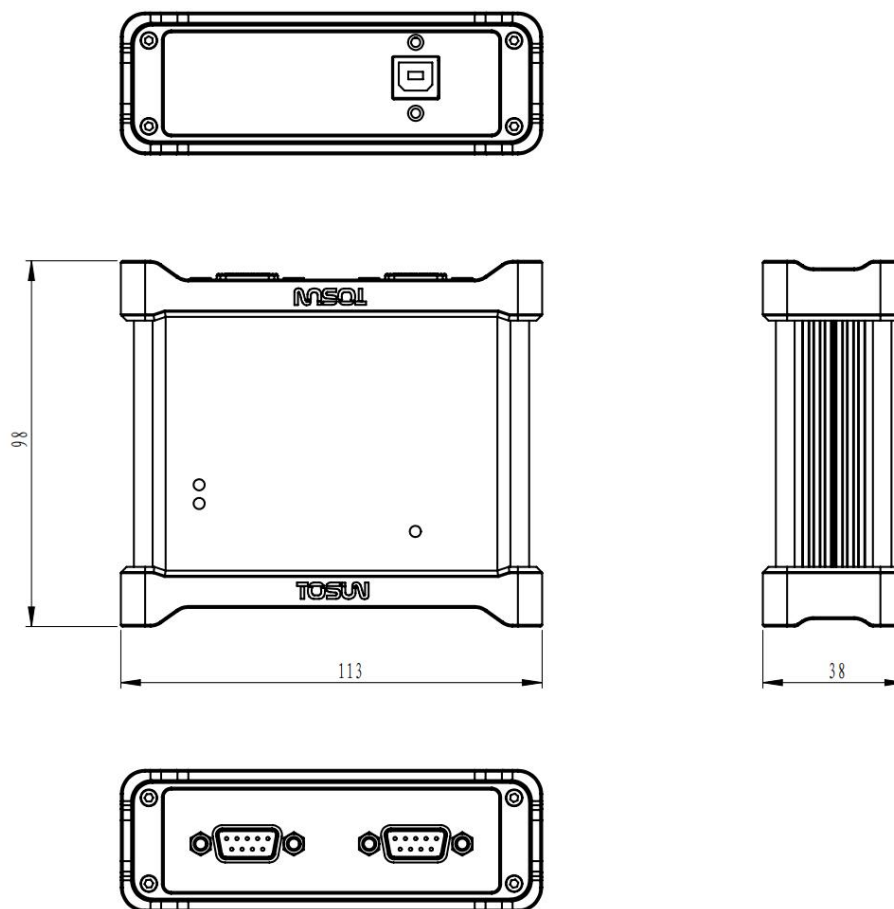


Figure 1-1 Mechanical Dimensions

1.3. Pin Definition

➤ CAN Interface



Figure 1-2 Hardware Interface (CAN FD)

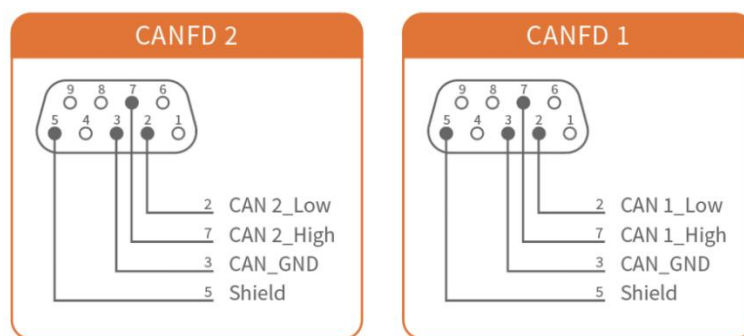


Figure 1-3 Pin Layout (CAN FD)

1.4. LED Indicators



Figure 1-4 Front Panel Layout

➤ LED Definitions

Indicator	Description
CAN FD 1 ~ 2	Status of CAN FD channel 1 ~ 2

➤ LED Color Description

Indicator	Color	Description
CAN FD	Green	Normal frame transmission/reception
	Red	Frame transmission/reception error — configuration, protocol, or wiring fault



The blinking frequency depends on the bus load rate — the higher the bus load, the faster it blinks.

1.5. System Requirements

➤ PC Requirements

- Operating System: Windows or Linux
- One available USB port (USB 2.0 or higher), or a powered USB hub

➤ Driver Installation

- The TC1013HV features a driver-free design, ensuring outstanding system compatibility. It can be used directly on Windows (7/8/10/11) or Linux without manual driver installation.

➤ Downloads

- TSMaster software
- PDF user manual
- Programming library (for secondary development)



The download link is available on the official website of Shanghai TOSUN Technology Ltd.: <https://www.tosunai.com/>

1.6. Packing List

Item	Qty.	Illustration	Standard/Optional
------	------	--------------	-------------------

TC1013HV Main Device	1		Standard
USB Cable	1		Standard

2. Application Example in Windows

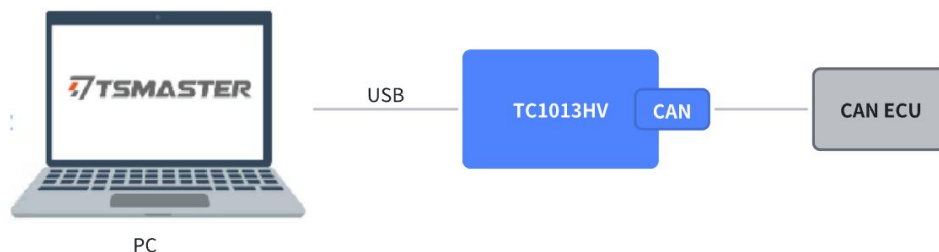


Figure 2-1 Example in Windows



For TSMaster installation instructions, please refer to the appendix.

2.1. Software Connection

1. Connect the device to the PC via the supplied USB cable.
2. In TSMaster, go to “Hardware” → “Channel Selection” to open the Channel Selector. Choose the desired CAN or LIN channels.

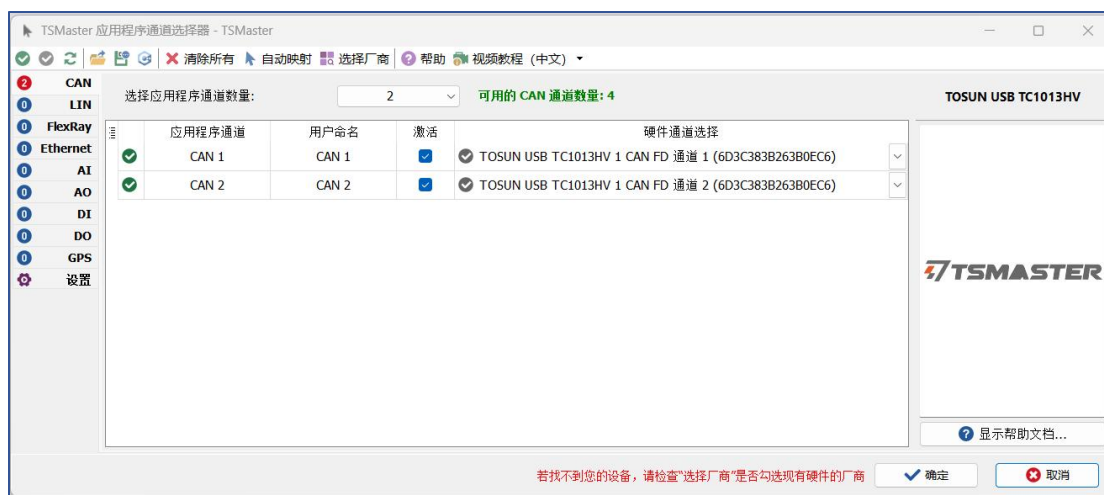


Figure 2-2 Channel Selection

3. Navigate to “Hardware” → “Bus Hardware” to open the “Hardware Configuration” window, where you can configure CAN parameters.

CAN configuration window:

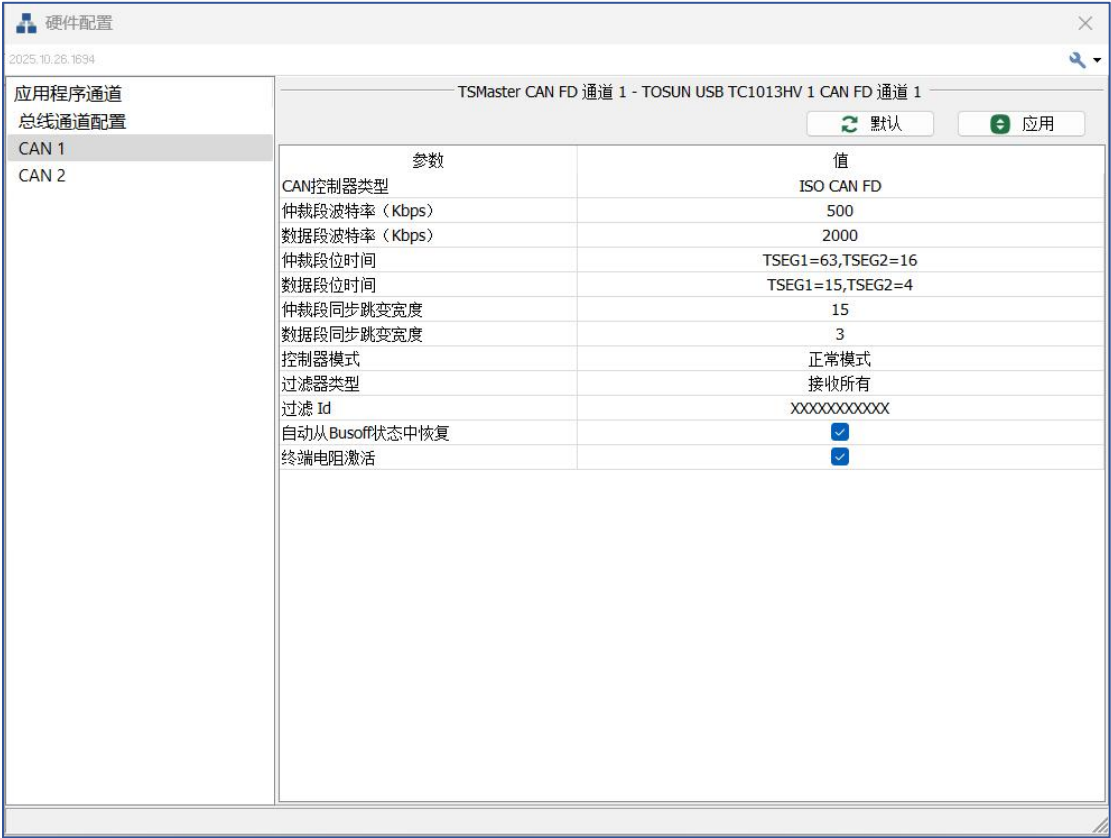


Figure 2-3 Channel Configuration (CAN)

4. Click “Analysis” → “Start” to connect the device.

2.2. Hardware Connection

2.2.1. CAN

The TC1013HV includes built-in termination resistors, which can be enabled or disabled in the software as required.

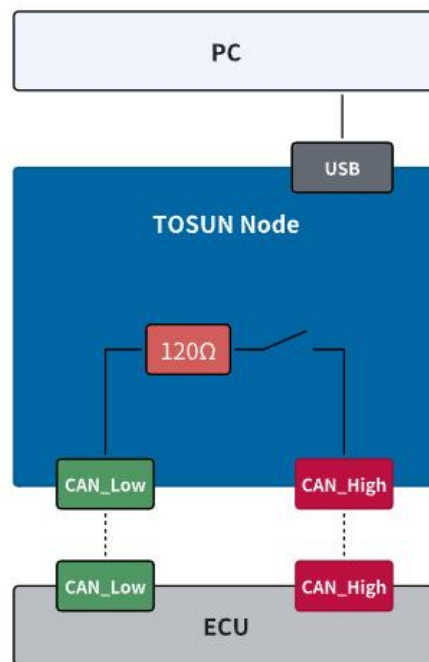


Figure 2-4 Using CAN



Pay attention to the termination-resistor enable settings. The TC1013HV comes with built-in termination resistors, which can be enabled or disabled via the software or API. The recommended configuration is to enable one 120Ω termination resistor at each end of the CAN bus, ensuring that the total bus resistance stays at 60Ω .

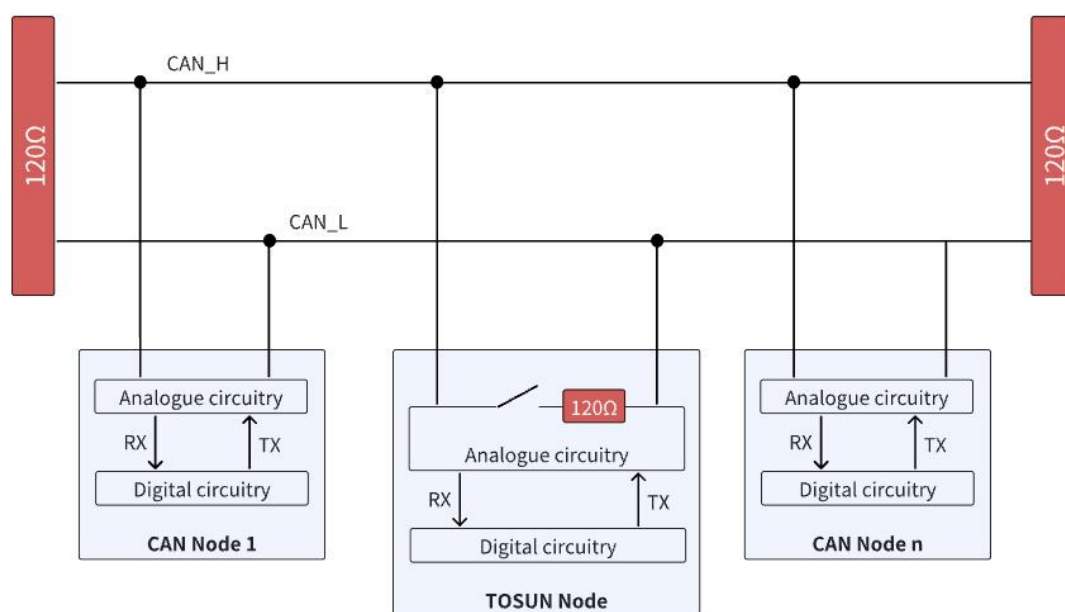


Figure 2-5 Connecting to the CAN Bus

2.3. Usage Example

2.3.1. Sending a CAN Frame

After configuring and connecting the software and hardware, messages can be sent through the “CAN/CAN FD Message Transmission” window in TSMaster or via a mini-program. Message details can be viewed in the “CAN/CAN FD Message Information” window.

➤ Via GUI

1. After configuration and connection, click “Analysis → Data Analysis → Message Transmission → Add CAN/CAN FD Transmission” to open the CAN/CAN FD Transmission window. Add a cyclic message as shown below, then click Send.



Figure 2-6 Adding CAN Message

2. Message information can be viewed under “Analysis → Data Analysis → Message Analysis → Add CAN/CAN FD Message Information.”

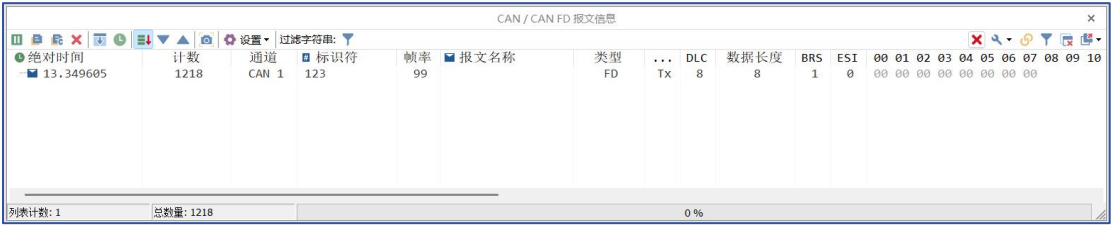


Figure 2-7 CAN Message Information

3. Bus statistics can be viewed under “Analysis → Data Analysis → Statistics → Show CAN Statistics” (example shows one channel).



Figure 2-8 CAN Statistics

➤ Via C Script

1. In the “CAN/CAN FD Transmission” window, right-click a message and select “Copy as C Script” to display example code. Copy the generated code.

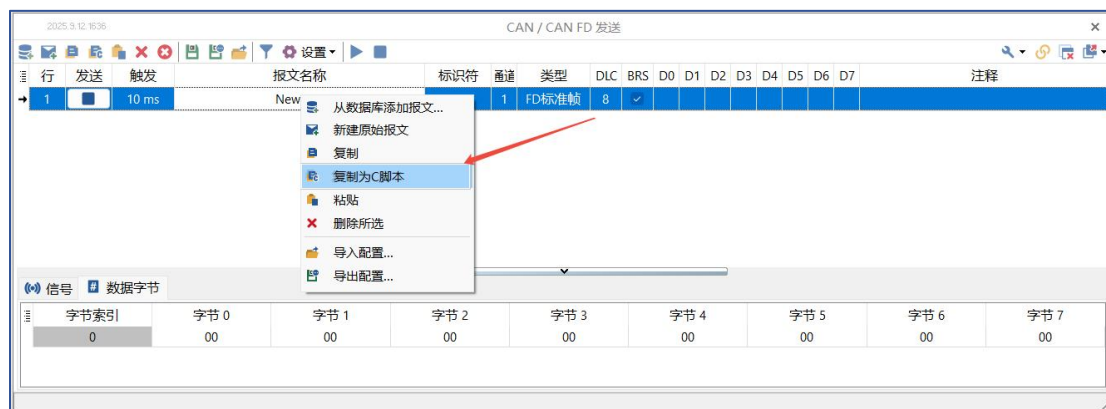


Figure 2-9 Quick Access to C Code

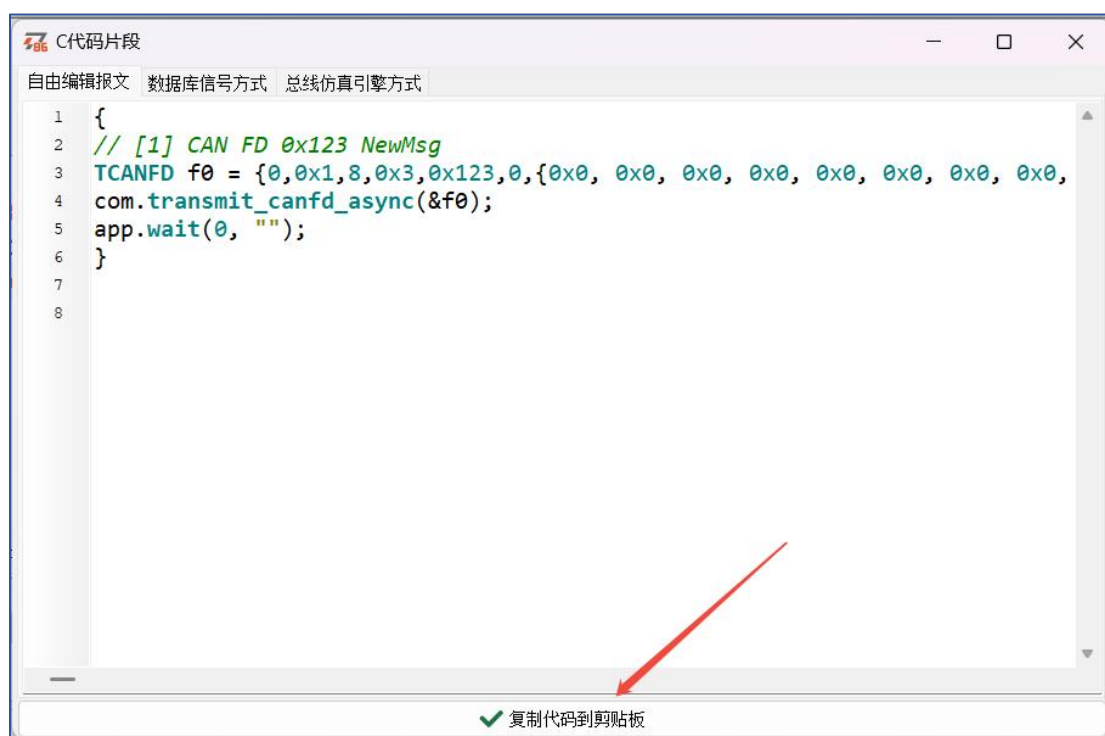


Figure 2-10 Copying the C Code

2. In the mini-program module, click “Design → Mini-program → Add C Mini-Program Editor” to open the C code editor.

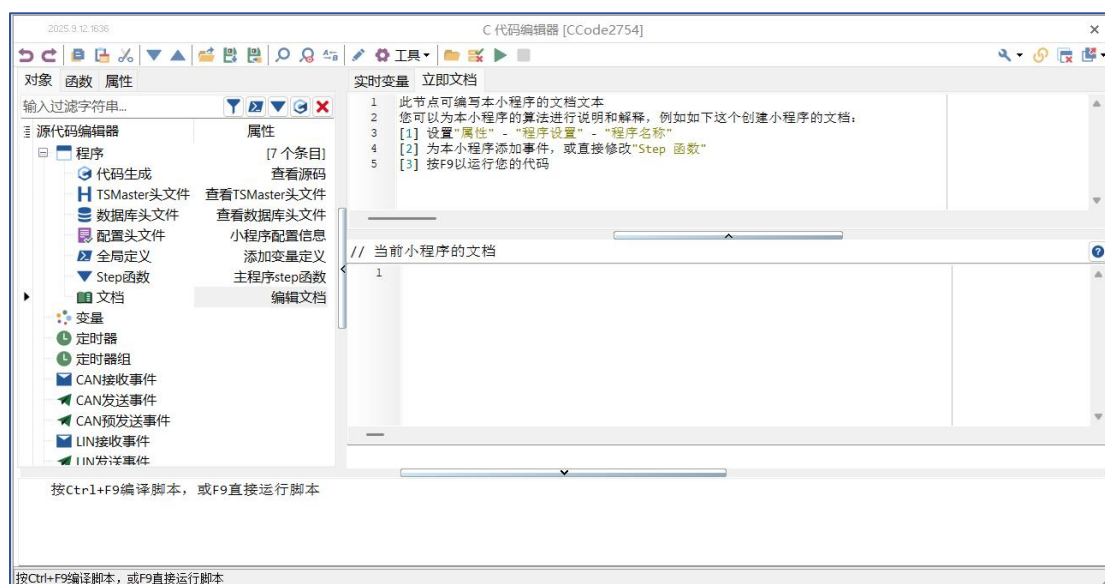


Figure 2-11 Adding a C Mini-Program Editor

3. In the C Code Editor, add a key event (e.g., Key A), paste the copied code into the event handler, then click Compile and Run.

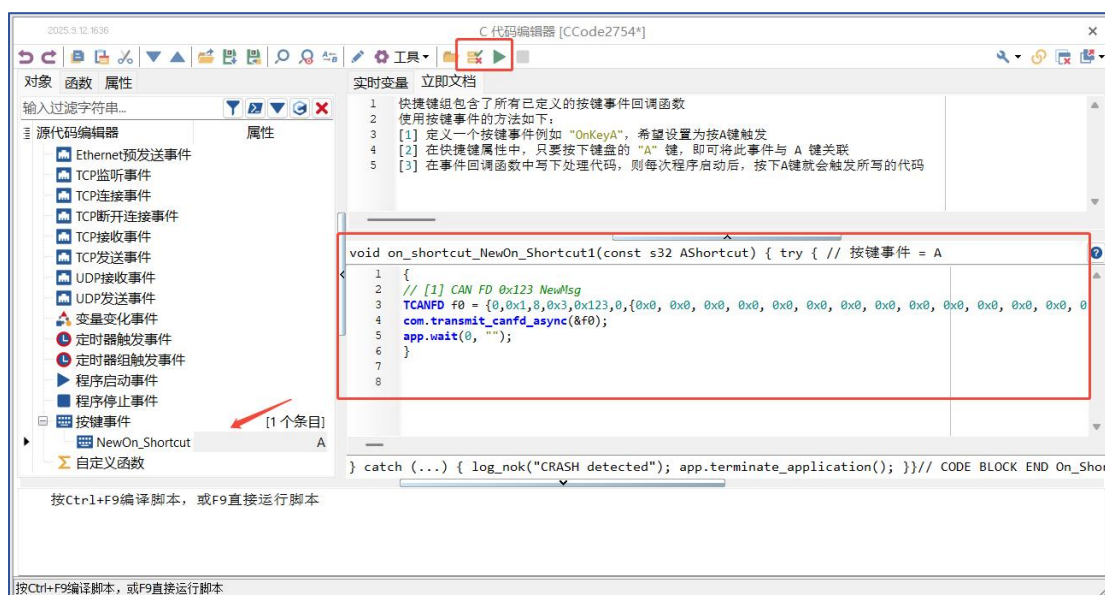


Figure 2-12 Building a C Mini-Program (CAN)

4. Each time Key A is pressed, a CAN message will be transmitted.

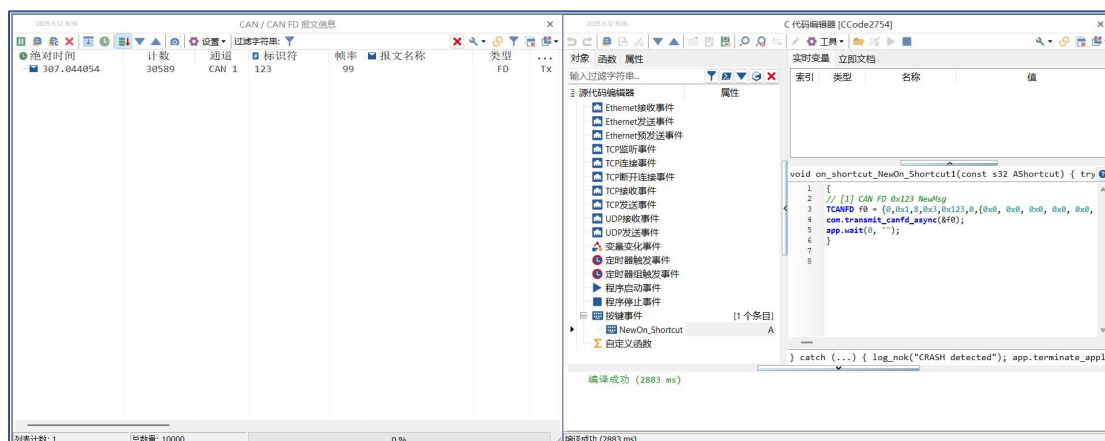


Figure 2-13 Sending CAN Messages via C Mini-Program

3. Appendix

3.1. Software Installation

The section describes the steps for installing the TSMaster software on a Windows PC.

➤ TSMaster Software Download

<https://www.tosunai.com/downloads/>

If the site is unavailable, contact your sales representative or visit the TOSUN official website.

You may also scan the QR code below to follow the official WeChat account and obtain download links.



Figure 3-1 TOSUN Official WeChat Account

➤ Software Installation

1. Double-click the TSMaster installer and select the installation language.

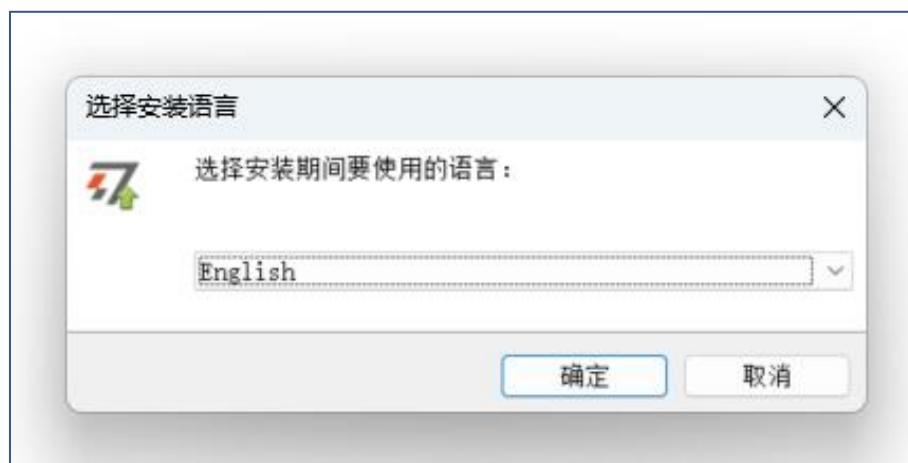


Figure 3-2 TSMaster Installation

2. Accept the license agreement and click “Next”.

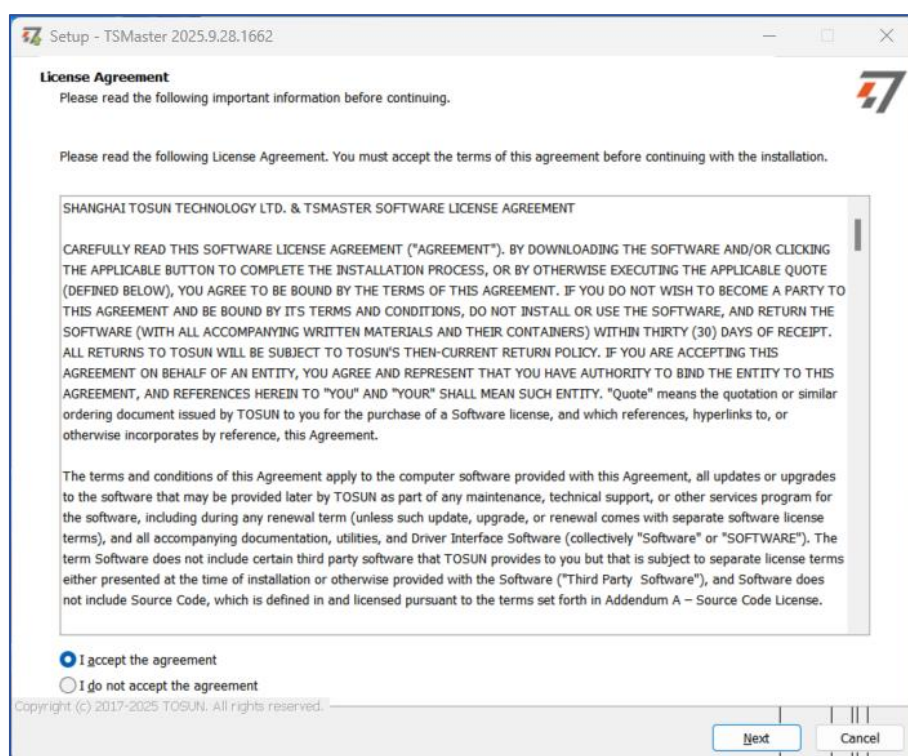


Figure 3-3 TSMaster Installation

3. Choose an installation directory and click “Next”.

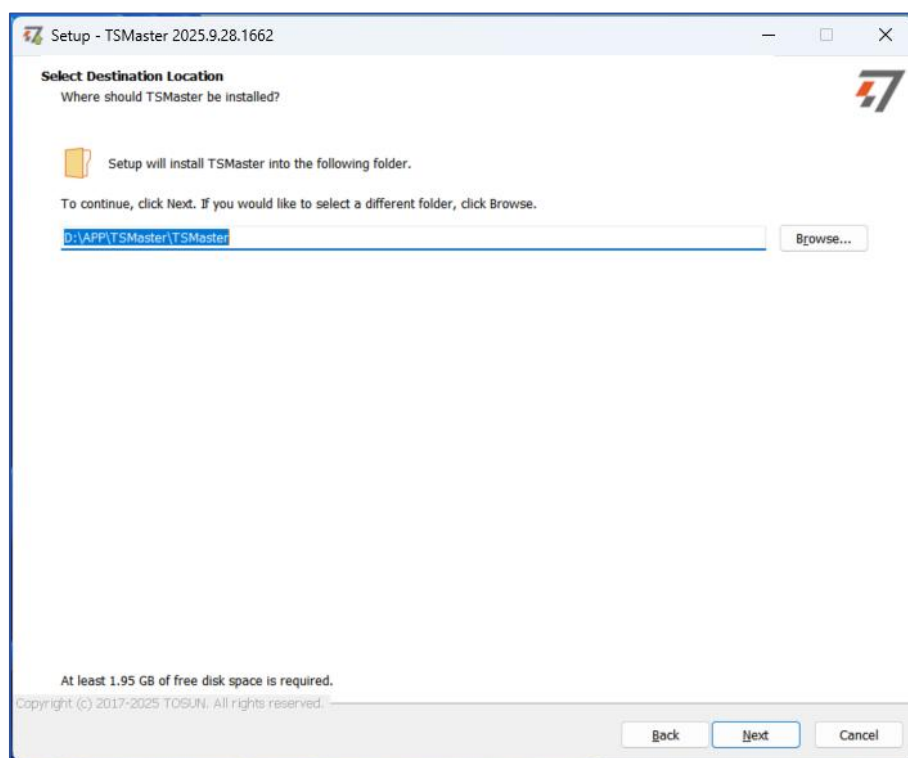


Figure 3-4 TSMaster Installation

4. Select additional tasks as needed and click “Next”.

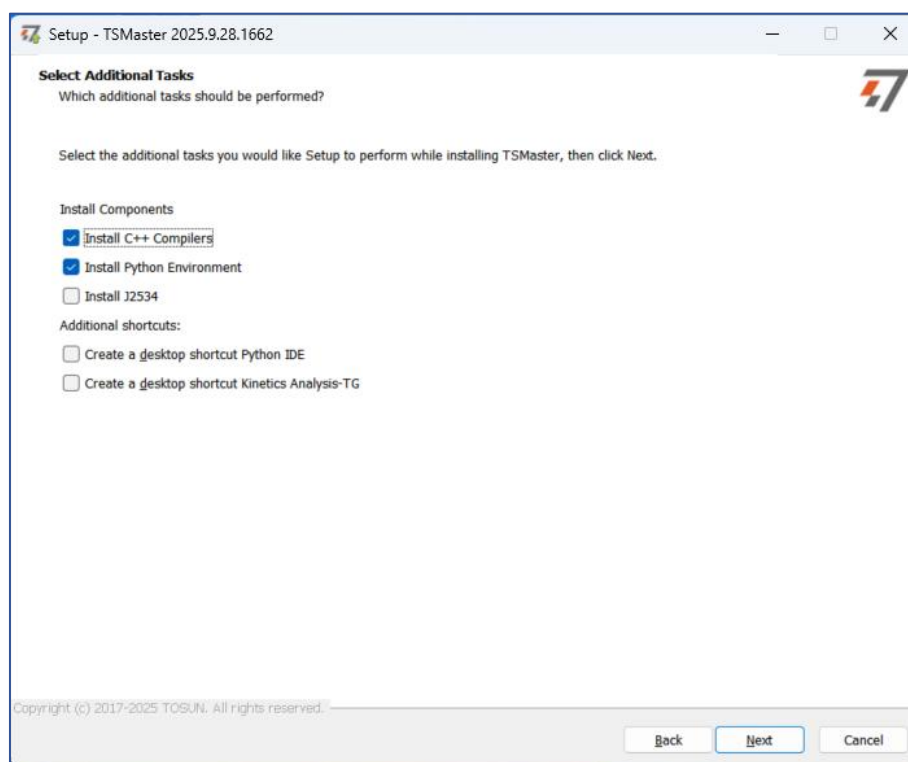


Figure 3-5 TSMaster Installation

5. Click “Install” and wait for completion.

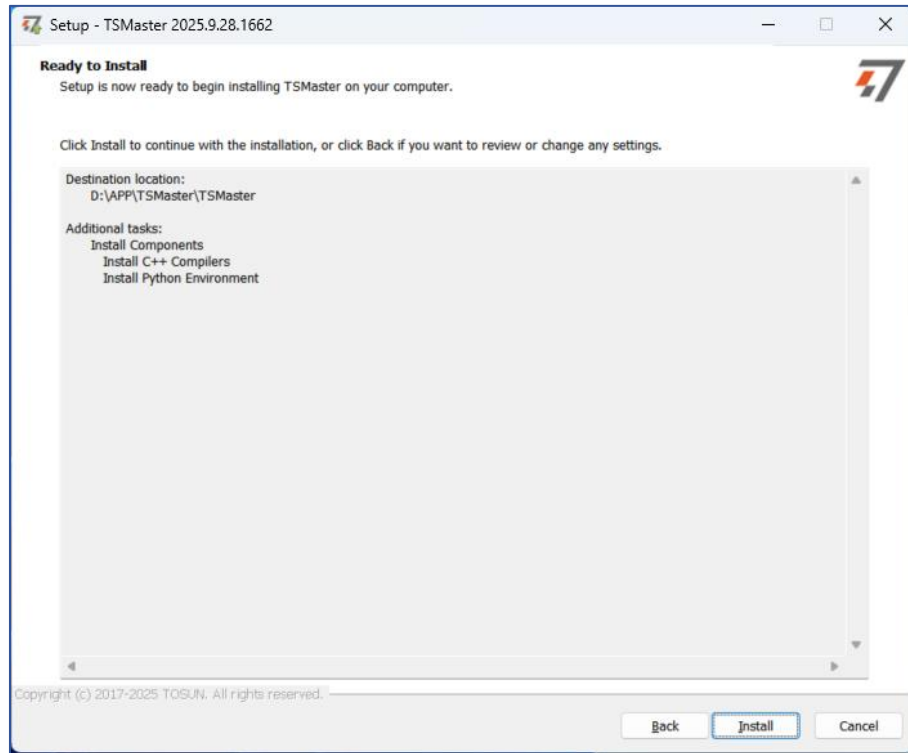


Figure 3-6 TSMaster Installation

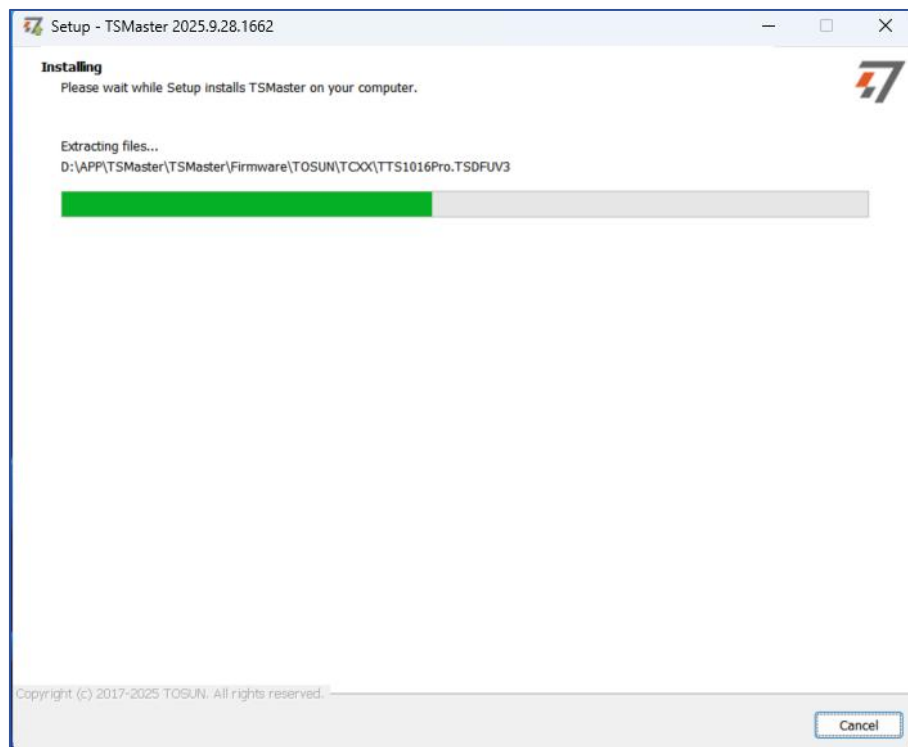


Figure 3-7 TSMaster Installation

6. Click “Finish” to complete installation.

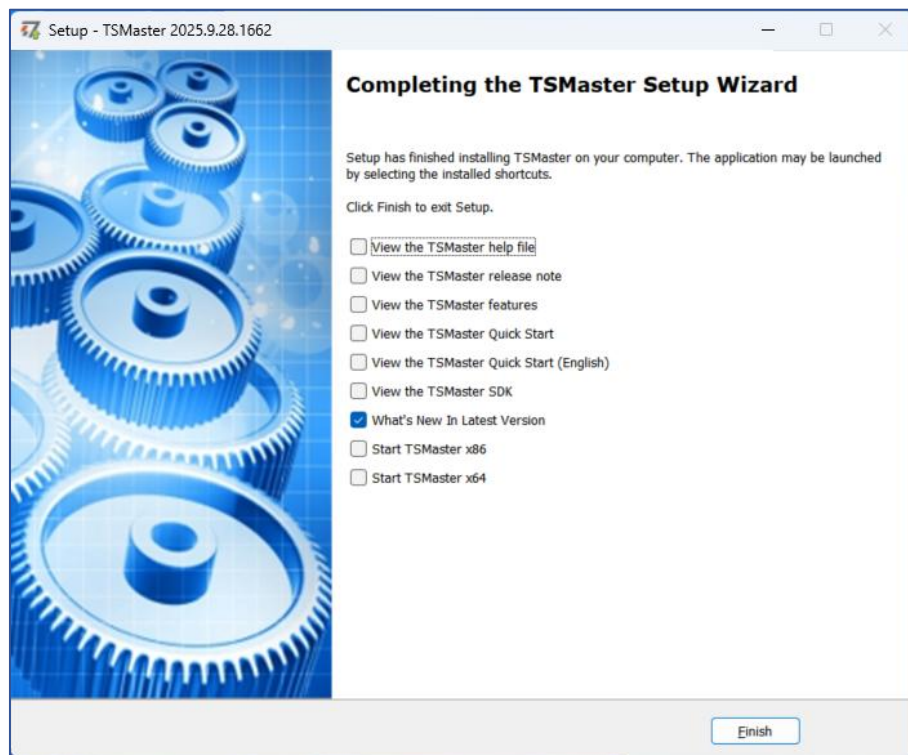


Figure 3-8 TSMaster Installation

4. Inspection and Maintenance

The TC1013HV primarily contains semiconductor components, which typically have a long service life. However, adverse environmental conditions may accelerate aging and degrade performance. To ensure proper operation, regular inspections are recommended to maintain the required environmental conditions.

It is recommended to inspect the device at least once every 6 to 12 months. In harsher environments, inspections should be performed more frequently. Refer to the table below for inspection criteria and recommended actions. If issues persist, please contact Shanghai TOSUN Technology Ltd.

➤ Power Environment Inspection

Item	Check Content	Standard/ Range	Action/Measure
Power Supply	Check voltage fluctuation at power input	USB port:+5V DC	Use a power meter or voltmeter at the input; ensure voltage fluctuation is within range
Ambient Conditions	Check ambient temperature (including internal temperature within enclosures)	-40°C ~ +40°C	Use a thermometer to ensure temperature is within specified range
	Check the ambient humidity (including internal humidity within enclosures)	10% ~ 90% RH	Use a hygrometer to ensure humidity is within specified range

➤ Contamination & Protection Check

Item	Check Content	Standard/ Range	Action/Measure
------	---------------	--------------------	----------------

Contamination	Check for accumulation of dust, powder, salt, and metal debris	None	Clean the device and prevent future contamination
	Check for exposure to water, oil, or chemicals	None	Clean and shield if necessary
Hazardous Gases	Check for corrosive or flammable gases	None	Use sensors or odor detection to verify

➤ Mechanical Stress & EMI Check


Item	Check Content	Standard/Range	Action/Measure
Mechanical Stress	Check vibration and shock levels	Within specified limits	Install padding or vibration isolation measures if necessary
Electromagnetic Environment	Check for noise sources near the device	No significant noise sources	Isolate or shield the device from noise sources

➤ Installation & Wiring Check

Item	Check Content	Standard/Range	Action/Measure
Wiring	Check crimped connectors in external wiring	Adequate clearance between connectors	Visually inspect and adjust as needed
	Check for damage to external wiring	No damage	Visually inspect and replace damaged cables if necessary

Software

Support CAN(FD)/LIN/FlexRay/SOME/IP and DoIP
 UDS diagnostics/ECU flashing/CCP/XCP calibration
 Embedded code generation/Application builder
 Encrypted release/Logging and bus replay
 Graphical programming/Residual bus simulation
 C and Python scripting
 Bus monitoring/Transmitting/Automated testing

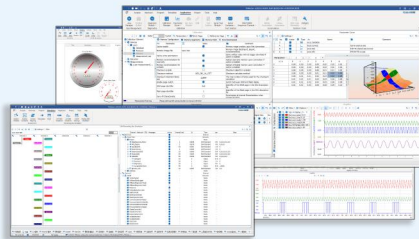

TSMaster

Hardware

1/2/4/8/12-channel CAN FD/CAN to USB/PCIe device
 1/2/6-channel LIN to USB/PCIe device
 Multi channel FlexRay/CAN FD to USB/PCIe device
 Multi channel automotive Ethernet/CAN FD to USB/PCIe device
 Automotive Ethernet media conversion device (T1 to Tx)
 Multi-channel CAN FD/Ethernet/LIN datalogger



TTS test systems

- CAN FD/CAN/FlexRay/LIN communication boards
- Relay and fault injection boards
- Resistors for sensor simulation
- Digital I/O, Analog I/O boards available



Solutions

- Bus Conformance
- Network Automation Testing System
- Charging Testing System
- EMB Calibration Testing Equipment
- Information Security Solutions
- Steer-by-Wire Chassis Testing Solutions
- EOL Testing Equipment
- Motor Performance
- Durability Testing Solutions
- FCT



About TOSUN

The core product, TSMaster, is a comprehensive tool for automotive R&D, testing, production, and after-sales. It integrates essential functions with hardware support to streamline processes and ensure precision, making it ideal for automotive professionals.

International Organization



Quality Assurance
ISO9001:2015

CE Certification



Contact Us :

+86 21-5956 0506
 sales@tosunai.com

website :

www.tosunai.com

